


Flat Cutter End Milling:

- End milling with flat cutter at $-22,5^\circ$, $+45^\circ$ range.



Reverse Cutter End Milling:

- End milling with reverse cutter at $-22,5^\circ$, -45° range.




Cutter Change System:

- Practical cutter change system provides ease of operation.

End Milling:

- Support system adjustable to four different profiles.
- High quality end milling thanks to hydropneumatic system.

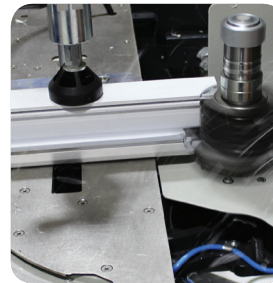



General Features

- End milling of PVC profiles at $22,5^\circ$ $+22,5^\circ$ range.
- Angle adjustment with mechanical support plates.
- Practical cutter progress speed adjustment.
- Safe operation with safety cover.
- Practical cutter adjustment thanks to cutter gab.
- Cutter storing with cutter shelf.

Optional Equipments



- End Milling Cutters

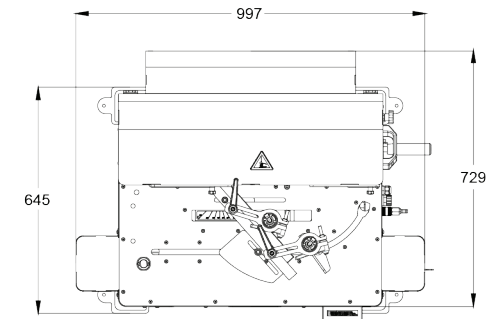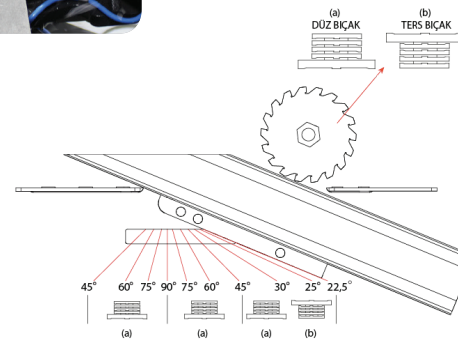

H: 1250 mm
W: 1030 mm
L: 770 mm



400 V
L1-L2-L3-N-PE
50 / 60 Hz
1.5 kW



150 kg



6-8 Bar
45 l / min



a max: 130 mm
min: 35 mm
h max: 120 mm
min: 35 mm



ØD: 180 mm
Ød: 30 mm
h max: 130 mm